

INTERIOR FILLER



GENERAL INFORMATION


Description

Powder filler

Intended use

Interior

- Filling holes and cracks of all sizes
- Fixing plaster mouldings, cornices and roses

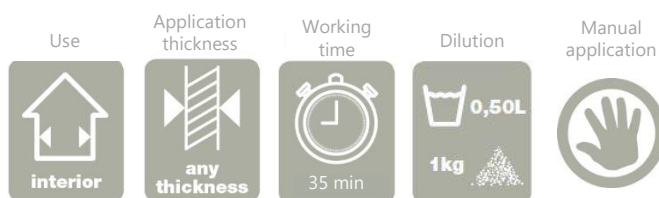

PRODUCT ADVANTAGES

- + Does not shrink or crack
- + No thickness limitation
- + Easy to mix
- + Easy to apply
- + Easy to sand
- + White

USE

DILUTION

50% - i.e. 0.50 litre of water per 1 kg of powder

PREPARATION

Gradually pour the powder into water, stirring until a homogeneous paste is obtained.

APPLICATION

Conditions

Do not apply at temperatures of below +8°C or above +35°C, or at a relative humidity of above 70% H.R.

Equipment

Filling knife, blade, smoothing trowel.

Equipment cleaning

With water before completely dry. Do not throw away into drains, dispose of this material and its container to an approved disposal contractor or taken to municipal collection point. Do not dispose into the environment.

APPLICATION THICKNESS

Any thickness

AVERAGE CONSUMPTION

1 kg of powder fills a volume of 1 litre

SUBSTRATES

Concrete, cellular concrete, cement, concrete block, brick, plaster, plasterboard, old painted substrates.
Substrates must be hard, cohesive, clean, sound and dry according to the local standards.


OVERCOAT

Primer, interior conventional paint, light-weight wall coverings.

INTERIOR FILLER



TECHNICAL DATA

COMPONANTS	Plaster base coat mix, organic binder, mineral fillers, additives.
pH	7 ± 0.5
COLOUR	White
WORKING TIME AT 20°C	Approximately 35 minutes
WAITING TIME BEFORE OVERCOATING CLASSIFICATION	Once completely dry NF T 36-005 - Family III, class 3
NORM	NF EN 16566
V.O.C	< 0.5 g/l (Ready mixed)
HEALTH AND SAFETY	 <p>Use in a well-ventilated place. Avoid direct contact with skin and eyes. Do not breathe dust. In case of prolonged contact, it is recommended to wear suitable gloves. Safety data sheet available on www.beissier.eu or www.quickfds.com</p>
PACKAGING	2 kg, 1 kg box - 6 kg bag
STORAGE	12 months from date of manufacture, in unopened original packaging, protected from frost, heat (max. +30°C), sun and moisture. Close well after use. Store in original packaging.

This data sheet supersedes and replaces any prior sheet relating to the same product.

Date of issue : April 2017

The purpose of this data sheet is to inform our customers about our product's properties. The information presented in the sheet is based on the current state of our knowledge. However, this information is no substitute for a description pertaining specifically to the type and condition of the substrate concerned. Since technical progress is continuously being made, it is our customer's responsibility, prior to use, to check with us that updated edition of this sheet has not been issued.